

DATA SHEET

Premium Efficiency Motor: **LAM200-9-449T**

60 Hz

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 8-Sep-2023
Document ID:

Customer:

MOTOR INFORMATION	
HP	200
RPM	900
Phase	3
Frequency	60Hz
Voltage	460
Frame Size	447/9T
Enclosure	TEFC
Degree of Protection	IP55
Service Factor	1.15
Poles	8
Full Load Speed	890
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	G
Duty Cycle	S1 / Continuous
Slip	1.11%
NEMA Design	B
Moment of Inertia	158.5 lb.ft.^2
Locked Rotor Time (Hot)	12 seconds
Sound Pressure Level	97 dB(A)
Number of Starts	2 Cold/1 Hot
Max Ambient Temperature	40°C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	Rigid
Rotation	Bi-Directional
Area of Classification	Class 1 Division 2 Groups A,B,C,D T3B
Inverter Rating	10:1 CT / 20:1 VT
Standard	NEMA MG-1
Approvals	UL, CE, IEEE45, ABS

EFFICIENCY/POWER FACTOR		
LOAD	EFF	P. F.
100%	94.5 %	0.78
75%	94.2 %	0.69
50%	93.8 %	0.62

TORQUE		
FULL LOAD	LRT	BDT
1181.4 lb.ft.	210 %	254 %

AMPERAGE INFORMATION		
	230V	460V
Full Load Amps	--A	256A
Locked Rotor Amps	--A	1459.2A
No Load Current	--A	110.3A
Usable at 208V		-- A

BEARING INFORMATION	
DE Bearing	NU320 C3
ODE Bearing	6316 C3
Grease Type	Mobil Polyrex EM
DE Regreasing Interval	2400 Hours
ODE Regreasing Interval	3600 Hours
Grease Quantity	51g/33g

ADDITIONAL DATA	
F2 Suitable	Yes
Shaft Material	4140
Connection Diagram	6 Lead Delta
Approximate Weight	lbs.


MOTOR DRAWING

Premium Efficiency Motor: **LAM200-9-449T**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net

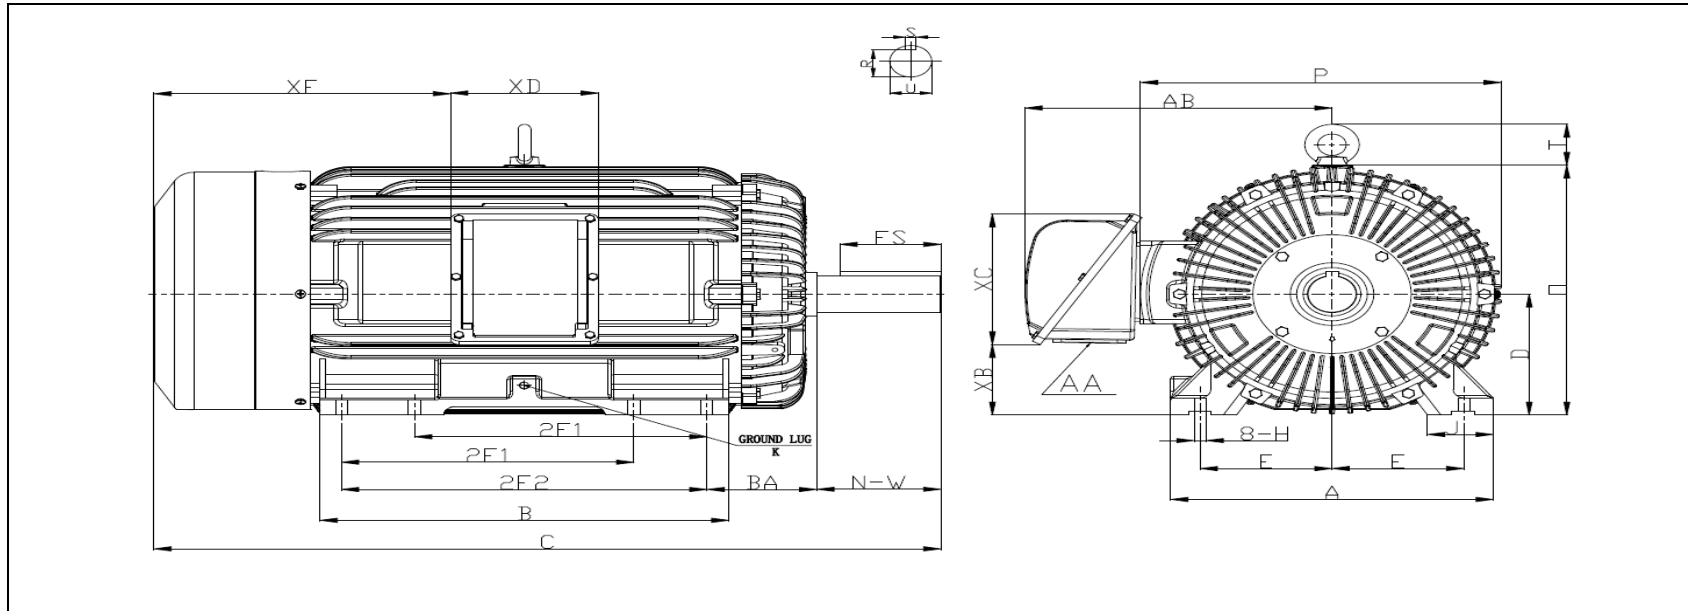

DIMENSION - INCHES

MOUNTING					A	B	C	D	G	J	P	O	T	AB
E	2F1	2F2	H	BA										
9	20	25	0.81	7.5	22	29	54.4	11	1.417	4.33	25.8	23.8	4.06	23.4

SHAFT & KEY				
S	ES	R	N-W	U
0.875	6.91	2.88	8.5	3.375

TERMINAL BOX				
AA	XB	XC	XD	XE
3 NPT	4.13	16.2	11.6	19.2

GROUND LUG
M12

PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net




Premium Efficiency Motor:

LAM200-9-449T

Document Generated: 8-Sep-2023
Document ID:

Customer:

Motor Type	AEH3		FL Speed	890	
Output Rating (HP)	200		LRT (%FLT)	210	
Full Load Torque	1181.4 lb.ft		460 volt FLA	256	
Rotor Wk ²	158.5 lb-ft ²		230 volt FLA	--	
			BDT (%FLT)	254	

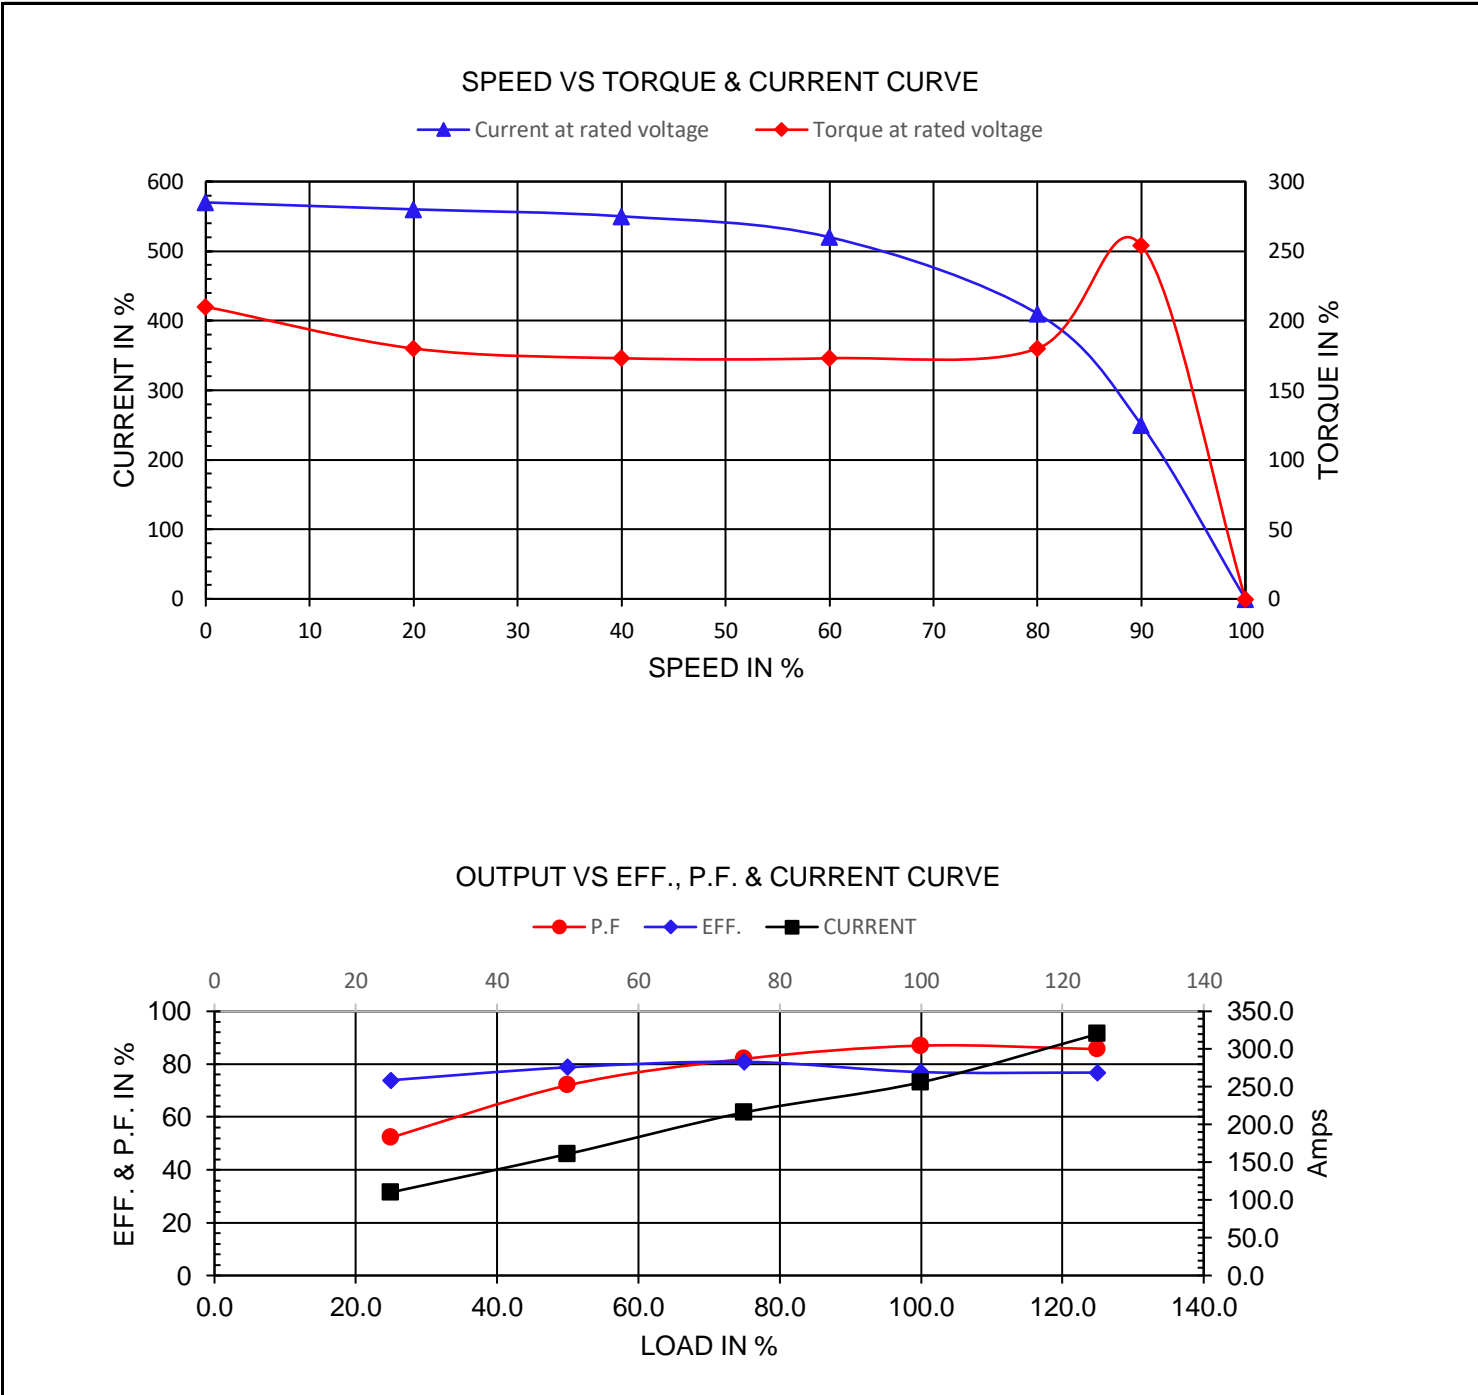

NAMEPLATE / WIRING

Premium Efficiency Motor: **LAM200-9-449T**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 8-Sep-2023
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

		THREE PHASE SEVERE DUTY MOTOR IEEE45								
Model :		Encl :		Type :		SN :				
HP :	Poles :	FR:	Ins:	Duty: Cont	IP :	Max Amb 40°C				
Hz :	CODE :		Hz :	HP :	Design :					
Volts :	P.F :		Volts :	DE BRG :						
Amps :	Eff :		Amps :	ODE BRG :						
RPM :	S.F :		RPM :	WT :						
			S.F :	Date :						
CC306B		LOUIS ALLIS A WORLDWIDE ELECTRIC COMPANY								
UL certified Class I, Division II, Groups A,B,C,D T3B										

Model:	LAM200-9-449T			Encl:	TEFC	Type:	AEH3	
HP:	200	Poles	8	FR:	447/9T	Ins:	F	IP: 55
Hz:	60	CODE:	G	Hz	50	HP:	150	Design: B
Volts:	460	P.F:	0.78	Volts:	380			
Amps:	256	Eff:	0.945	Amps	230.4			
RPM:	890	S.F:	1.15	RPM	740			
				S.F:	1.00			
						WT:	lbs.	