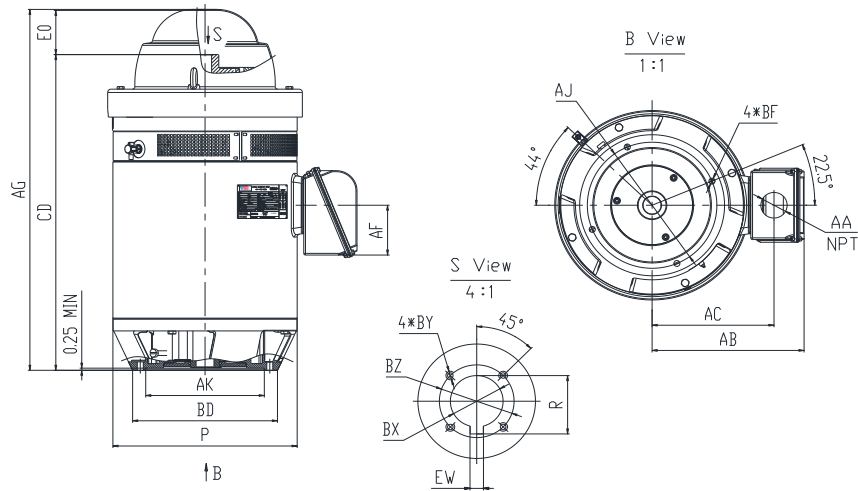




V2-100D4-W40416A

- VERTICAL HOLLOW SHAFT MOTOR
- NEMA PREMIUM EFFICIENCY
- INVERTER DUTY 20:1 VT
- INCLUDES INSULATED BEARING MOUNT - 40 HP AND ABOVE
- HIGH THRUST DESIGN
- THREE PHASE, OPEN DRIP PROOF (WP1) ENCLOSURE
- NON-REVERSE BALL TYPE RATCHET
- COUPLING INCLUDED



DIMENSIONS

HP	RPM	Frame	MOUNTING DIMENSIONS													
			BD	AJ	AK	BF	BX	BZ	EW	R	BY	CD	E0 >	AC	AA	AF
100	1788	404TP	16.5	14.75	13.5	0.69	1-1/2	2.125	0.375	1.706	1/4-20	36.94	4.56	13.68	3	5.83

OVERALL DIMENSIONS			BEARINGS	
P	AB	AG	UPPER	LOWER
21	17.3	42.2	7230B	6317

COUPLING: Motor comes with a 1.5" coupling. You may select a different size coupling at no extra charge.

BEARING LUBRICATION: The lower bearing comes lubricated with Mobil Polyrex EM Polyurea Grease.

OIL RESERVOIR: Motor is shipped without oil. The oil capacity is 4.5 quarts.

STEADY BUSHING: Motor is designed to accept a steady bushing. The bore size is 1-1/2 inches.





V2-100D4-W40416A







VERTICAL HOLLOW SHAFT MOTOR
NEMA PREMIUM EFFICIENCY
INVERTER DUTY 20:1 VT
INCLUDES INSULATED BEARING MOUNT - 40 HP AND ABOVE
HIGH THRUST DESIGN
THREE PHASE, OPEN DRIP PROOF (WP1) ENCLOSURE
NON-REVERSE BALL TYPE RATCHET
COUPLING INCLUDED

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient	Rating CONT
100	1790	404TP	230/460	60	1.15	F	B	0.54	H	WP1	23	40° C	S1

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			Down Thrust (lbs.)	Angular Contact Bearing	Radial Ball Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %	6700	UPPER	LOWER	12 Lead 2Δ/Δ	1473
112	812	95.4	95.2	94.4	94.5	0.88	0.87	0.83	289	238	255		7230B	6317		

NAME PLATE

 VERTICAL HOLLOW SHAFT HIGH THRUST DESIGN 							CONNECTION DIAGRAMS		
MODEL V2-100D4-W40416A				FRAME 404TP					
Hz 60	S.F. 1.15	ENCL WP1	DESIGN B						
HP 100	RPM 1790	INS F	PHASE 3						
VOLTS 230/460	FLA 224/112	MAX.AMBIENT 40° C							
Enclosure ODP	IP 23	RATING CONTINUOUS							
NEMA CODE H	P.F. 0.88	MOTOR WEIGHT 1473 LBS.							
NOM EFF 95.4	MIN EFF 94.5	CONNECTION 12 Lead 2Δ/Δ							
DOWN THRUST 6700 LBS.	BASE DIAMETER 16.5 INCHES								
UPPER BEARING 7230B	LOWER BEARING 6317								
OIL CAP. UPPER BEARING 4.5 QTS.	LUBRICATION MOBIL POLYREX EM								
NON-REVERSE RATCHET - BALL TYPE	SERIAL NO.								
Specifically designed for use on deep well turbine pump applications. Hernando, Mississippi	 E310089		CC082A		PART WIND START CAPABLE @ 230V				
ROTATION 									
MOTOR IS SUITABLE FOR INVERTER RATED 20:1 VT									

APPLICATIONS:

Specifically designed for use on deep well turbine pump applications. The coupling is equipped with a non-reverse ratchet, which prevents motor rotation from backspin at shutdown. These motors are built to NEMA standards and have special bearing arrangements to carry heavy thrust loads.