



V2-60D4-W36416B

VERTICAL HOLLOW SHAFT MOTOR

NEMA PREMIUM EFFICIENCY

INVERTER DUTY 20:1 VT


INCLUDES INSULATED BEARING MOUNT - 40 HP AND ABOVE

HIGH THRUST DESIGN

THREE PHASE, OPEN DRIP PROOF (WP1) ENCLOSURE

NON-REVERSE BALL TYPE RATCHET

COUPLING INCLUDED

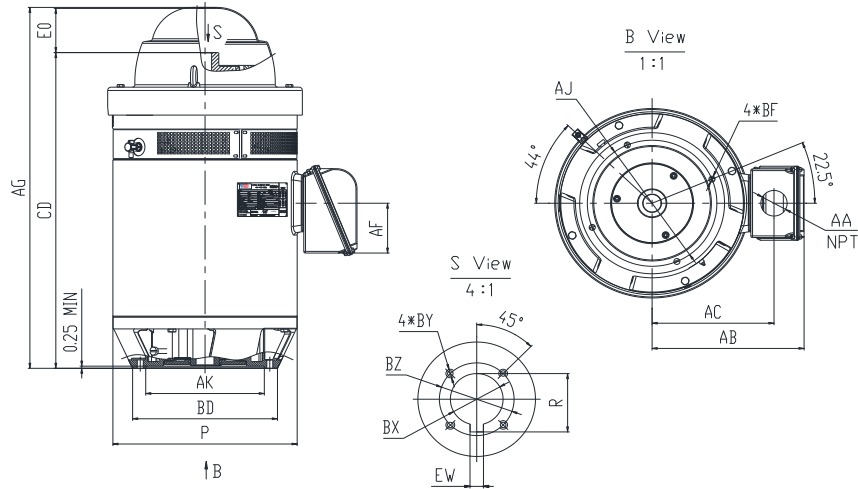

DIMENSIONS

HP	RPM	Frame	MOUNTING DIMENSIONS													
			BD	AJ	AK	BF	BX	BZ	EW	R	BY	CD	E0 >	AC	AA	AF
60	1787	364TP	16.5	14.75	13.5	0.69	1-3/16	1.75	0.25	1.304	1/4-20	31.16	4.56	12.56	3	5.83

OVERALL DIMENSIONS			BEARINGS	
P	AB	AG	UPPER	LOWER
19.1	16.32	36	7224B	6314

COUPLING: Motor comes with a 1.188" coupling. You may select a different size coupling at no extra charge.

BEARING LUBRICATION: The lower bearing comes lubricated with Mobil Polyrex EM Polyurea Grease.

OIL RESERVOIR: Motor is shipped without oil. The oil capacity is 1.94 quarts.

STEADY BUSHING: Motor is designed to accept a steady bushing. The bore size is 1-3/16 inches.

NEMA
Premium

CAUS



V2-60D4-W36416B






VERTICAL HOLLOW SHAFT MOTOR
NEMA PREMIUM EFFICIENCY
INVERTER DUTY 20:1 VT
INCLUDES INSULATED BEARING MOUNT - 40 HP AND ABOVE
HIGH THRUST DESIGN
THREE PHASE, OPEN DRIP PROOF (WP1) ENCLOSURE
NON-REVERSE BALL TYPE RATCHET
COUPLING INCLUDED

PERFORMANCE DATA

HP	RPM	Frame	Voltage	Frequency (Hz)	Full Load S.F.	Insulation Class	NEMA Design	Slip (%)	NEMA Code	Enclosure Type	IP Rating	Max. Ambient	Rating CONT
60	1785	364TP	230/460	60	1.15	F	B	0.81	H	WP1	23	40° C	S1

Amps (460V)		Efficiency (%)				Power Factor			Torque (ft-lb)			Down Thrust (lbs.)	Angular Contact Bearing	Radial Ball Bearing	Connection	Weight (lbs.)
FLA	LRA	100%	75%	50%	Min.	100%	75%	50%	FLT	LRT %	BDT %	5600	UPPER	LOWER	12 Lead 2Δ/Δ	1024
68.3	530	95.0	94.8	93.9	94.1	0.87	0.84	0.76	174	230	265		7224B	6314		

NAME PLATE

 VERTICAL HOLLOW SHAFT HIGH THRUST DESIGN 							CONNECTION DIAGRAMS			
MODEL V2-60D4-W36416B				FRAME 364TP						
Hz	60	S.F.	1.15	ENCL	WP1	DESIGN				B
HP	60	RPM	1785	INS	F	PHASE				3
VOLTS	230/460	FLA	136.6/68.3	MAX.AMBIENT 40° C						
Enclosure	ODP	IP	23	RATING CONTINUOUS						
NEMA CODE	H	P.F.	0.87	MOTOR WEIGHT 1024 LBS.						
NOM EFF	95.0	MIN EFF	94.1	CONNECTION 12 Lead 2Δ/Δ						
DOWN THRUST	5600	LBS.		BASE DIAMETER	16.5	INCHES				
UPPER BEARING	7224B	LOWER BEARING	6314							
OIL CAP. UPPER BEARING	1.94	QTS.		LUBRICATION	MOBIL POLYREX EM					
NON-REVERSE RATCHET - BALL TYPE				SERIAL NO.						
Specifically designed for use on deep well turbine pump applications. Hernando, Mississippi		 E310089		CC082A		PART WIND START CAPABLE @ 230V				
		ROTATION 								

MOTOR IS SUITABLE FOR INVERTER RATED 20:1 VT

APPLICATIONS:

Specifically designed for use on deep well turbine pump applications. The coupling is equipped with a non-reverse ratchet, which prevents motor rotation from backspin at shutdown. These motors are built to NEMA standards and have special bearing arrangements to carry heavy thrust loads.