



WORLDWIDE MOTOR CONTROLS  
 Soft Starters  
 General Purpose Solid State Soft Starters



## MODEL: WWEPICSSRV12-150

### General Product Specifications

- NEMA 4 Enclosure
- Service entrance rated
- Advanced Motor Protection
- Full panel surge protection
- Integral full rated bypass contactor with X-Line mode
- Front panel indicators and keypad
- Start/stop, HOA, reset buttons
- Current imbalance, overcurrent, undercurrent, phase loss, shorted load, and ground fault protections standard
- Soft stop feature eliminates water hammer
- Run pilot light
- Emergency stop push button
- Illuminated fault/reset push button

Rated Power	230V	75 HP
	460V	150 HP
Max Full Load Amps		210 A
Outside Dimensions		48x33x16
Input Voltage	208-480VAC ±10%, 50/60Hz Optional 380, 415, 575VAC	
Overload Rating	500% for 30s	
Overload Range	160-240 A	
CT Rating	200:5	
Ambient Conditions	0° to 40 °C, 5-95% relative humidity, 0-3300ft above sea level (Can be designed to operate outside these conditions)	
Inputs	7	dry contacts using 120VAC
Programmable Outputs	3	2-Form C (5A, 240VAC max) 1- Form A 26 programmable functions



DRIVING & Controlling



# Industry

WorldWideElectric





WWEPICSSRV12-150


REV NO	REVISION	DATE	BY
D	UPDATED	7/24/15	GC

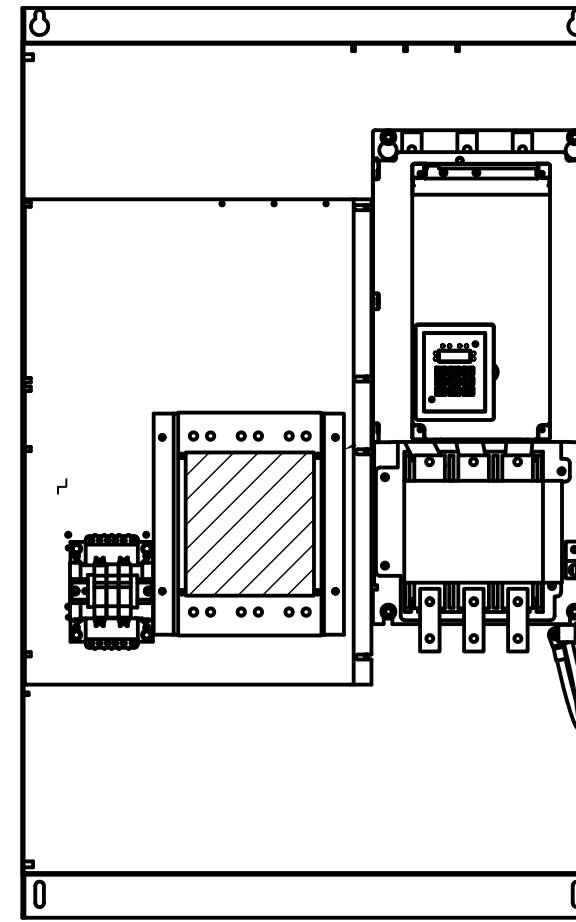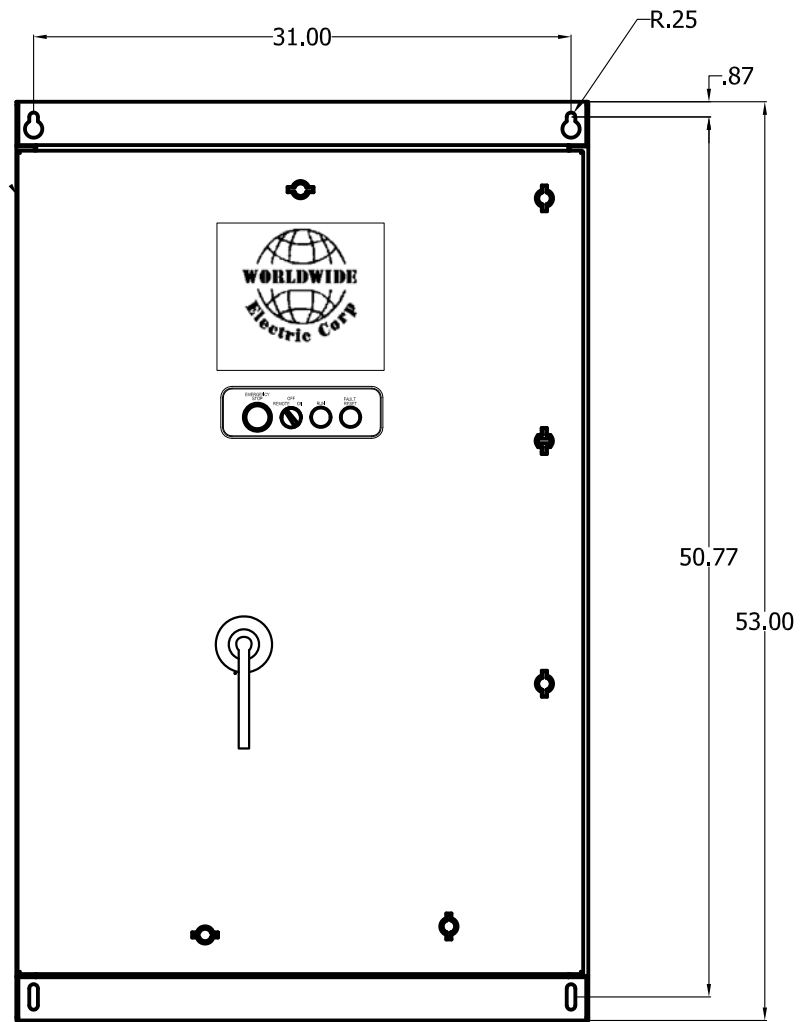

SECTION A-A

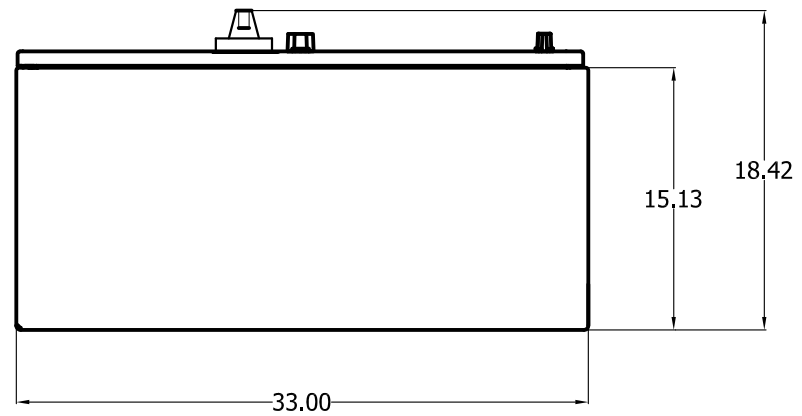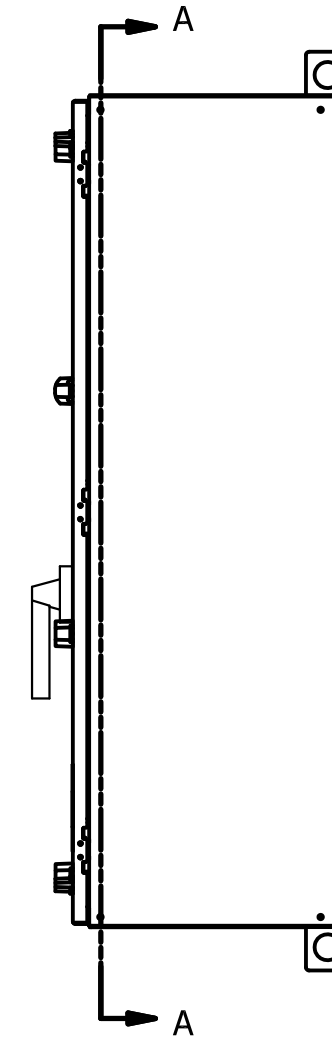

NOTE  
1. UNITS ARE NEMA 4 RATED.



	800-808-2131 3540 WINTON PLACE ROCHESTER, NY 14623		
	WWEPICSSRV12-150/500 ASSEMBLY DRAWING		
SCALE	DRAWING NUMBER	DRAWN BY	REV. BY
NOTED	VMX-0140	C.L. CHK'D. BY	GFC
SHEET	REV. No.	DATE	
1 OF 1	D	06/16/2015	