

## WORLDWIDE MOTOR CONTROLS Soft Starters Positive Displacement Pump Soft Starters


## WWEPDASSRV12-600

## **General Product Specifications**

- NEMA 4/12 Enclosure
- Service entrance rated
- 230/460V Rated
- Advanced Motor Protection
- Full panel surge protection
- CB with door mounted lockable handle
- Integral full rated bypass contactor with X-Line mode
- Accepts inputs for up to 7 Murphy switches
- Individually selectable for NO or NC
- Interposing relays isolation on Murphy inputs
- Vibration tip, crank case oil level, low pressure, high pressure, oil level, lubricator oil level, spare lamps
- Front panel indicators and keypad
- Start/stop, HOA, reset buttons
- Indicating LED's on I/O board (troubleshooting aid)
- Current imbalance, overcurrent, undercurrent, phase loss, shorted load, and ground fault protections standard

				, ,	
Rated Power			230V	300 HP	
			460V	600 HP	
Max Full Load Amps				800 A	
Outside Dimensio	ns			92x36x30	
Input Voltage		230/460VAC ±10%, 50/60Hz Optional 380, 415, 575VAC			
Overload Rating		Normal Duty: 500% for 20s (Variable Torque Applications) Heavy Duty: 500% for 60s (Constant Torque Applications)			
Overload Range		560-840 A			
CT Rating		700:5			
Ambient Conditions		0° to 50 °C, 5-95% relative humidity, 0-3300ft above sea level (Can be designed to operate outside these conditions)			
Inputs	7	dry cont	dry contacts using 24VDC		
Programmable Outputs	3	2-Form C (5A, 240VAC max) 1- Form A 26 programmable functions			
Dedicated Fault Output	1	AC Triac solid state switch 240VAC 50mA max			



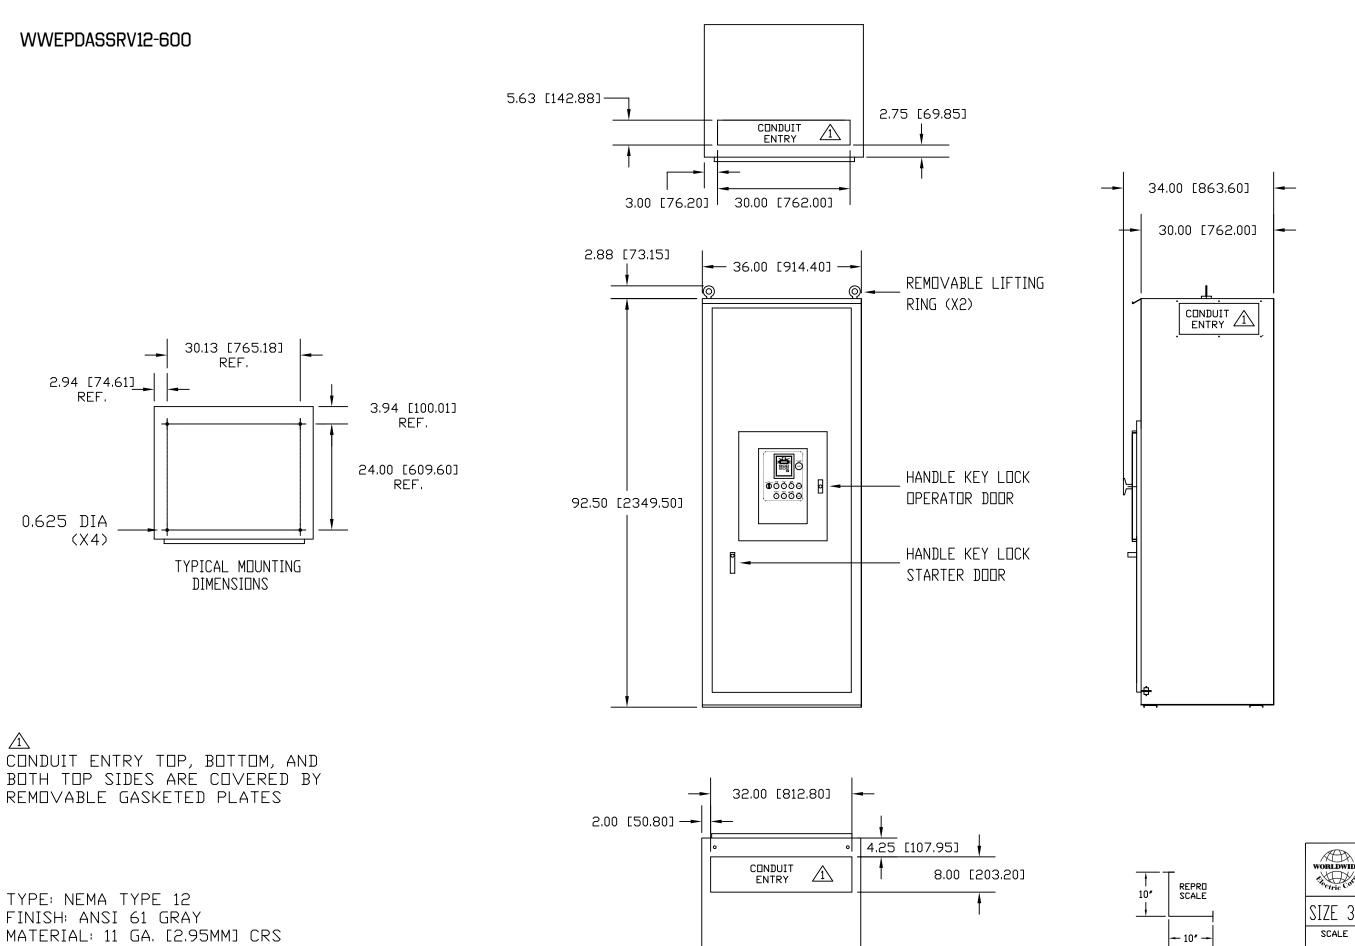

APPROXIMATE WEIGHT: 1200 LBS. [544 KG]

DIMENSIONS: INCHES [MILLIMETERS]

WORLDWIDE

3540 WINTON PLACE
ROCHESTER, NY 14623

SIZE 3 ENCLOSURE OUTLINE DIMENSION

SCALE DRAWING NUMBER DRAWN BY REV. BY RRH CHK'D. BY GFC

SHEET REV. No. DATE
1 OF 1 06/16/2015

DATE BY

03/20/08 RD 06/16/15 GC

REVISION

1 RELEASED
2 UPDATED