



# WORLDWIDE ELECTRIC MOTOR DATA SHEET

## OCCP3-18-182JM



HORSEPOWER	3		
RPM / POLES	1800 / 4		
VOLTAGE / PHASE	208 - 230 / 460 V / 3		
FRAME	182JM		
ENCLOSURE / DEGREE OF PROTECTION	ODP / IP23		
FREQUENCY	60 HZ Suitable For 50 HZ Operation With 1.0 SF		
FULL LOAD SPEED	1759 RPM		
SERVICE FACTOR	1.15 SF 60 HZ / 1.0 SF at 50 HZ		
INSULATION CLASS	F		
FULL LOAD AMPS; 230 / 460	7.6 / 3.8 A		
LOCKED ROTOR AMPS (STARTING); 230 / 460	69.90 / 34.95 A		
NO LOAD CURRENT	3.38 / 1.69 A		
NEMA CODE LETTER	L		
EFFICIENCY / POWER FACTOR	<u>LOAD</u>	<u>EFF.</u>	<u>P.F.</u>
	100%	89.5%	0.82
	75%	89.4%	0.76
	50%	87.7%	0.65
DUTY CYCLE	S1 / Continuous		
TORQUE	<u>FULL LOAD</u>	<u>LRT</u>	<u>BDT</u>
	3.03 lb.ft.	365.0%	427.0%
SLIP	2.275%		
NEMA DESIGN	B		
NUMBER OF STARTS (Hot / Cold)	2 Hot / 3 Cold		
MAX. AMBIENT TEMPERATURE	40° C		
MAX. ELEVATION	3300 Ft. Above Sea Level		
TEMPERATURE RISE (At Full Load)	80° C		
DE BEARING	6307ZZ		
ODE BEARING	6305ZZ		
GREASE TYPE	Multemp SRL		
MOUNTING	F1		
ROTATION	Bi-Directional		
APPROXIMATE WEIGHT	68.3 Lbs.		
AREA CLASSIFICATION	Non-Hazardous		
INVERTER RATING	10:1 CT / 20:1 VT PWM Type		
SPECIFICATION - In Accordance With	NEMA, UR		




JULY 16, 2020



# WORLDWIDE ELECTRIC MOTOR DRAWING

## OCCP-182JM

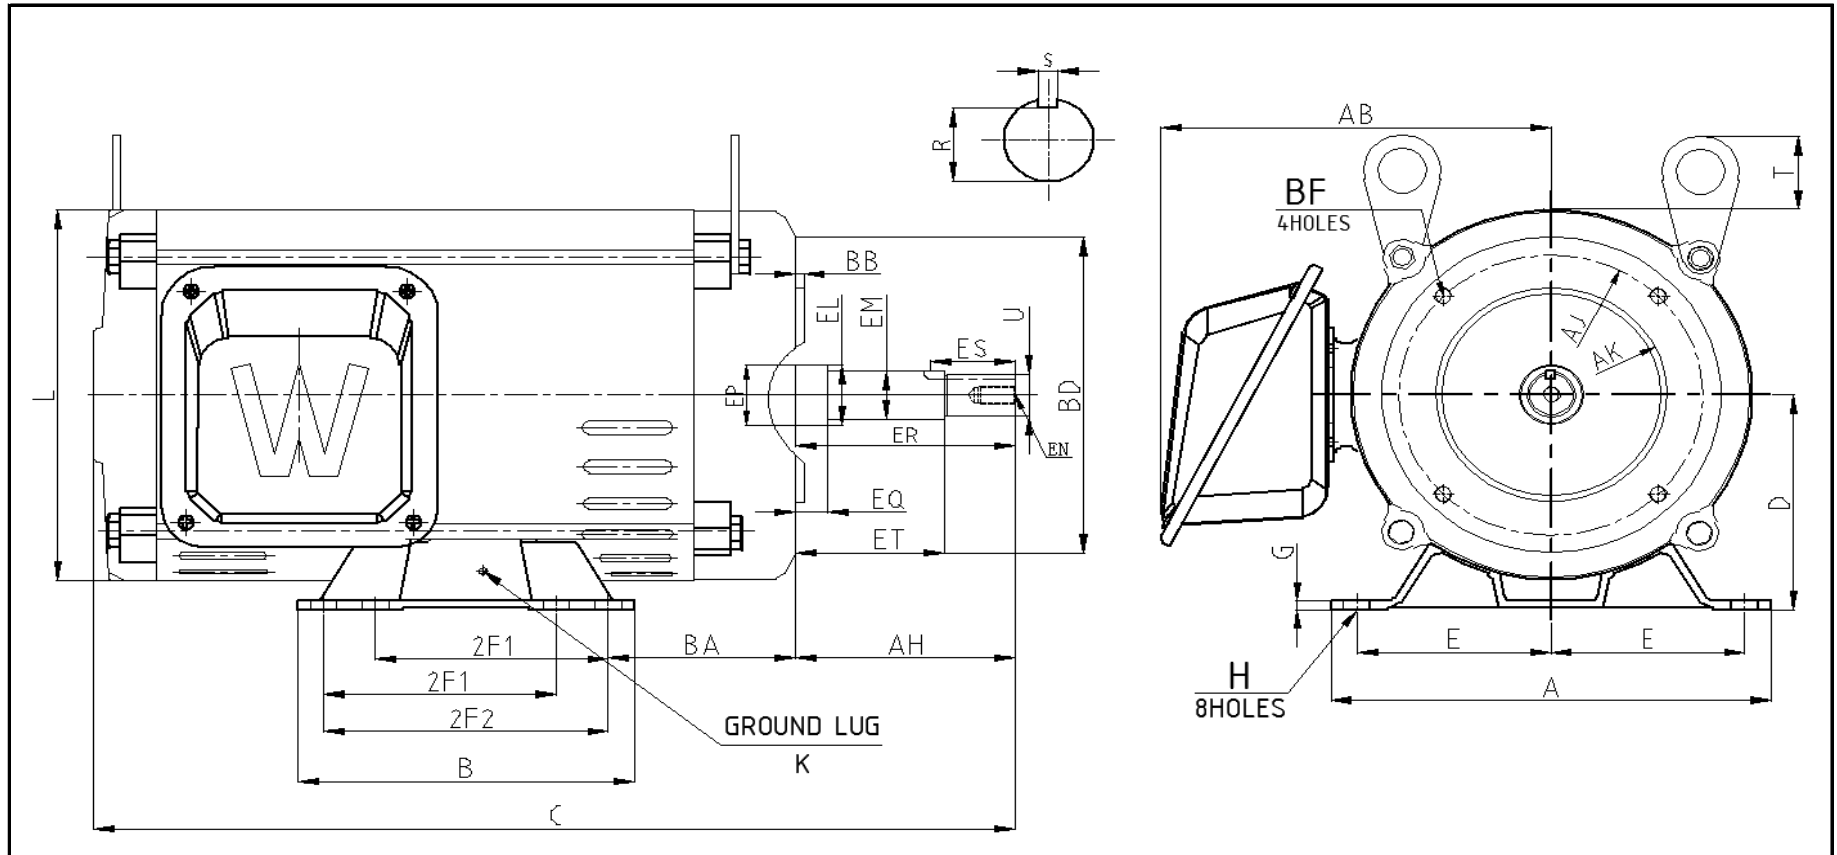

**DIMENSIONS - INCHES**

MOUNTING					A	B	C	D	G	AB	L	T	KEYSET		KEY	
E	2F1	2F2	H	BA									R	ES	S	
3.75	5.5	4.5	0.41	3.63	8.5	6.5	17.81	4.5	0.41	6.5	7.8	1.53	0.771	1.65	0.188	

FLANGE					AH	SHAFT EXTENSION								K
AK	AJ	BF	BB	BD		EL	EM	EP	EQ	ER	ET	EN	U	
4.5	5.875	3/8-16 * 0.56	0.156	6.63	4.25	1.25	1	1.25	0.625	4.25	2.875	3/8-16 * 0.75	.875	M5

REVISED - 02/10/18