

DATA SHEET

Premium Efficiency Motor: **OJ12-36-56JRD,**

60 Hz

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 5-May-2022
Document ID:

Customer:

MOTOR INFORMATION	
HP	1/2
RPM	3600
Phase	1
Frequency	60 Hz
Voltage	115/230
Frame Size	56J
Enclosure	ODP
Degree of Protection	IP23
Service Factor	1.60
Poles	2
Full Load Speed	3540
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	L
Duty Cycle	S1 / Continuous
Slip	1.71%
NEMA Design	N
Moment of Inertia	0.0343 lb.ft.^2
Locked Rotor Time (Hot)	12 seconds
Sound Pressure Level	78 dB(A)
Number of Starts	2
Max Ambient Temperature	40°C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	CW Facing ODE
Area of Classification	Safe
Inverter Rating	N/A
Standard	NEMA MG-1
Approvals	UL

EFFICIENCY/POWER FACTOR		
LOAD	EFF	P. F.
100%	72.4 %	0.89
75%	71.1 %	0.85
50%	61.6 %	0.79

TORQUE		
FULL LOAD	LRT	BDT
0.737 lb.ft.	390 %	394 %

AMPERAGE INFORMATION		
	115V	230V
Full Load Amps	4.802A	2.401A
Locked Rotor Amps	43.08A	21.54A
No Load Current	2.364A	1.182A
Usable at 208V	2.7A	

BEARING INFORMATION	
DE Bearing	6203-ZZ
ODE Bearing	6203-ZZ
Grease Type	NS7 ENS
DE Regreasing Interval	- Hours
ODE Regreasing Interval	- Hours
Grease Quantity	-


CAPACITOR INFORMATION	
Start Capacitor	1 - 200-240µf/125V
Run Capacitor	1 - 25µf/250V

ADDITIONAL DATA	
F2 Suitable	No
Shaft Material	S45C + SUS304
Connection Diagram	115 / 230 V - 3 Lead
Approximate Weight	22.8 lbs.

ODP Jet Pump Motor Drawing

56JRD

WorldWide Electric Corporation
 1 (800) 808-2131
 Worldwideelectric.net

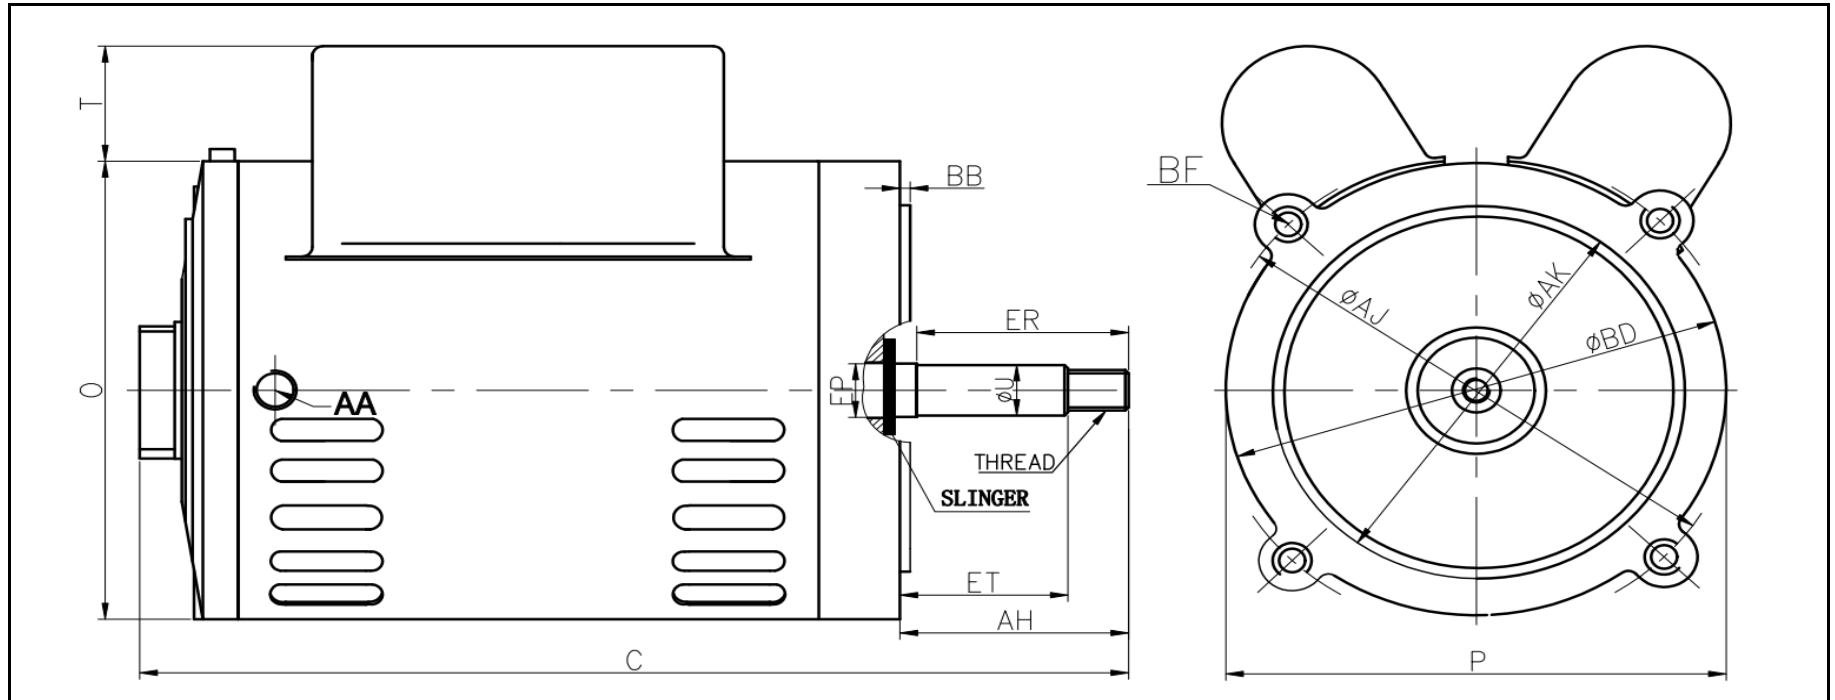

DIMENSIONS - INCHES

C	P	O	T	AA
11.1	5.67	5.67	1.43	1/2 NPT

SHAFT & KEY					
EP	ET	ER	AH	U	THREAD
0.66	1.88	2.37	2.56	0.625	7/16-20 2A UNF

FLANGE				
AK	BD	AJ	BF	BB
4.5	5.67	5.875	4*3/8-16 UNC	0.12

REVISED - 5/4/2022

NAMEPLATE / WIRING

Premium Efficiency Motor: **OJ12-36-56JRD**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 5-May-2022
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

		OPEN DRIP PROOF SINGLE PHASE JET PUMP MOTOR					
Model :		Encl : ODP		SN :		CW ROTATION OPE	
HP :	Poles : 2	FR :	Ins : F	IP 23	Max Amb 40°C	Duty : Cont	HIGH VOLTAGE ② ① — L1 T8 — ④ — L2 T2 — T3 — ③
Hz : 60	CODE:		Design :				LOW VOLTAGE ② — T3 L1 — ① L2 — ④ — T8 T2 — ③
Volts :	P.F. :		DE BRG :				
Amps :	Eff :		ODE BRG :				
RPM :	S.F. :		WT : LBS				
Usable on 208V 60Hz network at ___ Amps		S.F.A :		Date :			
WorldWide Electric Corporation							

Model	OJ12-36-56JRD		
HP	1/2	Frame	56J
Hz	60 Hz	Code	L
Voltage	115/230	P.F.	0.89
Amps	4.802A/2.401A	Nom.Eff.	72.4%
RPM	3540	S.F.	1.6
		S.F.A	3.576A
Usable on 208V 60Hz Network at	2.7A		
Design	N		
DE Brg	6203-ZZ		
ODE Brg	6203-ZZ		
WT	22.8 lbs.		