

DATA SHEET

Premium Efficiency Motor: **OJ2-36-56CRD,**

60 Hz

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 5-May-2022
Document ID:

Customer:

MOTOR INFORMATION	
HP	2
RPM	3600
Phase	1
Frequency	60 Hz
Voltage	115/230
Frame Size	56C
Enclosure	ODP
Degree of Protection	IP23
Service Factor	1.20
Poles	2
Full Load Speed	3525
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	H
Duty Cycle	S1 / Continuous
Slip	2.03%
NEMA Design	L
Moment of Inertia	0.069 lb.ft.²
Locked Rotor Time (Hot)	12 seconds
Sound Pressure Level	78 dB(A)
Number of Starts	2
Max Ambient Temperature	40°C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	CW Facing ODE
Area of Classification	Safe
Inverter Rating	N/A
Standard	NEMA MG-1
Approvals	UL

EFFICIENCY/POWER FACTOR		
LOAD	EFF	P. F.
100%	82.9 %	0.96
75%	83.5 %	0.95
50%	79.0 %	0.93

TORQUE		
FULL LOAD	LRT	BDT
2.998 lb.ft.	277 %	244 %

AMPERAGE INFORMATION		
	115V	230V
Full Load Amps	16.106A	8.053A
Locked Rotor Amps	123.26A	61.63A
No Load Current	4.13A	2.065A
Usable at 208V	8.9A	

BEARING INFORMATION	
DE Bearing	6203-ZZ
ODE Bearing	6203-ZZ
Grease Type	NS7 ENS
DE Regreasing Interval	- Hours
ODE Regreasing Interval	- Hours
Grease Quantity	-


CAPACITOR INFORMATION	
Start Capacitor	1 - 400-480µf/250V
Run Capacitor	1 - 60µf/250V

ADDITIONAL DATA	
F2 Suitable	No
Shaft Material	S45C + SUS304
Connection Diagram	115 / 230 V - 3 Lead
Approximate Weight	35.6 lbs.

ODP Jet Pump Motor Drawing

56CRD

WorldWide Electric Corporation
 1 (800) 808-2131
 Worldwideelectric.net

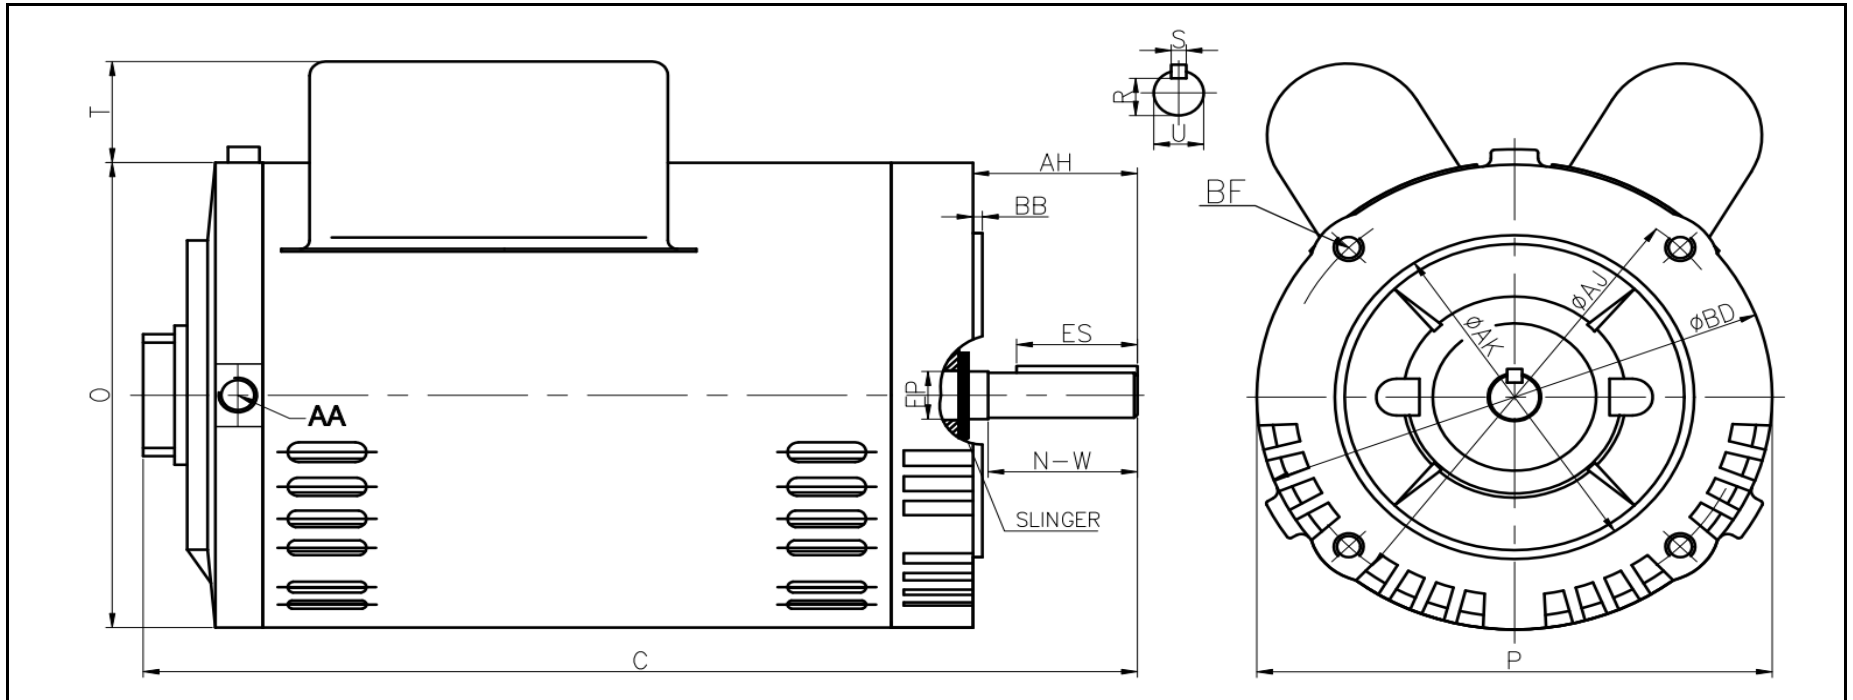

DIMENSIONS - INCHES

C	P	O	T	AA
12.5	6.5	6.5	1.4	1/2 NPT

SHAFT & KEY						
S	ES	R	N-W	U	AH	EP
0.188	1.41	0.517	1.88	0.625	2.06	0.66

FLANGE				
AK	BD	AJ	BF	BB
4.5	6.5	5.875	4*3/8-16 UNC	0.12

REVISED - 5/4/2022

NAMEPLATE / WIRING

Premium Efficiency Motor: **OJ2-36-56CRD**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 5-May-2022
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

		OPEN DRIP PROOF SINGLE PHASE JET PUMP MOTOR						
Model :		Encl : ODP		SN :			CW ROTATION OPE	
HP :	Poles : 2	FR :	Ins : F	IP 23	Max Amb 40°C	Duty : Cont	HIGH VOLTAGE	
Hz : 60	CODE:			Design :				
Volts :	P.F. :			DE BRG :		LOW VOLTAGE		
Amps :	Eff :			ODE BRG :				
RPM :	S.F. :			WT : LBS				
Usable on 208V 60Hz network at ___ Amps				S.F.A :		Date :		
WorldWide Electric Corporation								

Model	OJ2-36-56CRD	Frame	56C	Design	L
HP	2	Code	H	DE Brg	6203-ZZ
Hz	60 Hz	P.F.	0.96	ODE Brg	6203-ZZ
Voltage	115/230	Nom.Eff.	82.9%	WT	35.6 lbs.
Amps	16.106A/8.053A	S.F.	1.2		
RPM	3525	S.F.A	9.72A		
Usable on 208V 60Hz Network at		8.9A			