

DATA SHEET

Premium Efficiency Motor: **PEWWE3-12-213T**

60 Hz

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 31-Jul-2023
Document ID:

Customer:

MOTOR INFORMATION	
HP	3
RPM	1200
Phase	3
Frequency	60 Hz
Voltage	230/460 V
Frame Size	213T
Enclosure	TEFC
Degree of Protection	IP55
Service Factor	1.25
Poles	6
Full Load Speed	1175
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	K
Duty Cycle	S1 / Continuous
Slip	2.08%
NEMA Design	B
Moment of Inertia	0.678 lb.ft.^2
Locked Rotor Time (Hot)	24 seconds
Sound Pressure Level	64 dB(A)
Number of Starts	2 Cold/ 1 Hot
Max Ambient Temperature	40°C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	Bi-Directional
Area of Classification	Class 1 Division 2 Groups A,B,C,D T3C(160°C)
Inverter Rating	10:1 CT / 20:1 VT PWM Type
Standard	NEMA MG-1
Approvals	CSA-US, CE

EFFICIENCY/POWER FACTOR		
LOAD	EFF	P. F.
100%	89.5 %	0.7
75%	89.5 %	0.65
50%	88.2 %	0.53

TORQUE		
FULL LOAD	LRT	BDT
13.4 lb.ft.	155 %	240 %

AMPERAGE INFORMATION		
	230V	460V
Full Load Amps	8.97A	4.48A
Locked Rotor Amps	64A	32A
No Load Current	5.2A	2.6A
Usable at 208V	9.92A	

BEARING INFORMATION	
DE Bearing	6308ZZ C3
ODE Bearing	6207ZZ C3
Grease Type	-
DE Regreasing Interval	- Hours
ODE Regreasing Interval	- Hours

ADDITIONAL DATA	
F2 Suitable	Yes
Shaft Material	1045 Carbon Steel
Connection Diagram	230 / 460 V - 9 Lead Y
Approximate Weight	147 lbs.

PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net




Premium Efficiency Motor:

PEWWE3-12-213T

Document Generated: 31-Jul-2023
 Document ID:

Customer:

Motor Type	PEWWE		FL Speed	1175		
Output Rating (HP)	3		LRT (%FLT)	155	460 volt FLA	4.48 A
Full Load Torque	13.4	lb.ft	BDT (%FLT)	240	230 volt FLA	8.97 A
Rotor Wk ²	0.678	lb-ft ²				

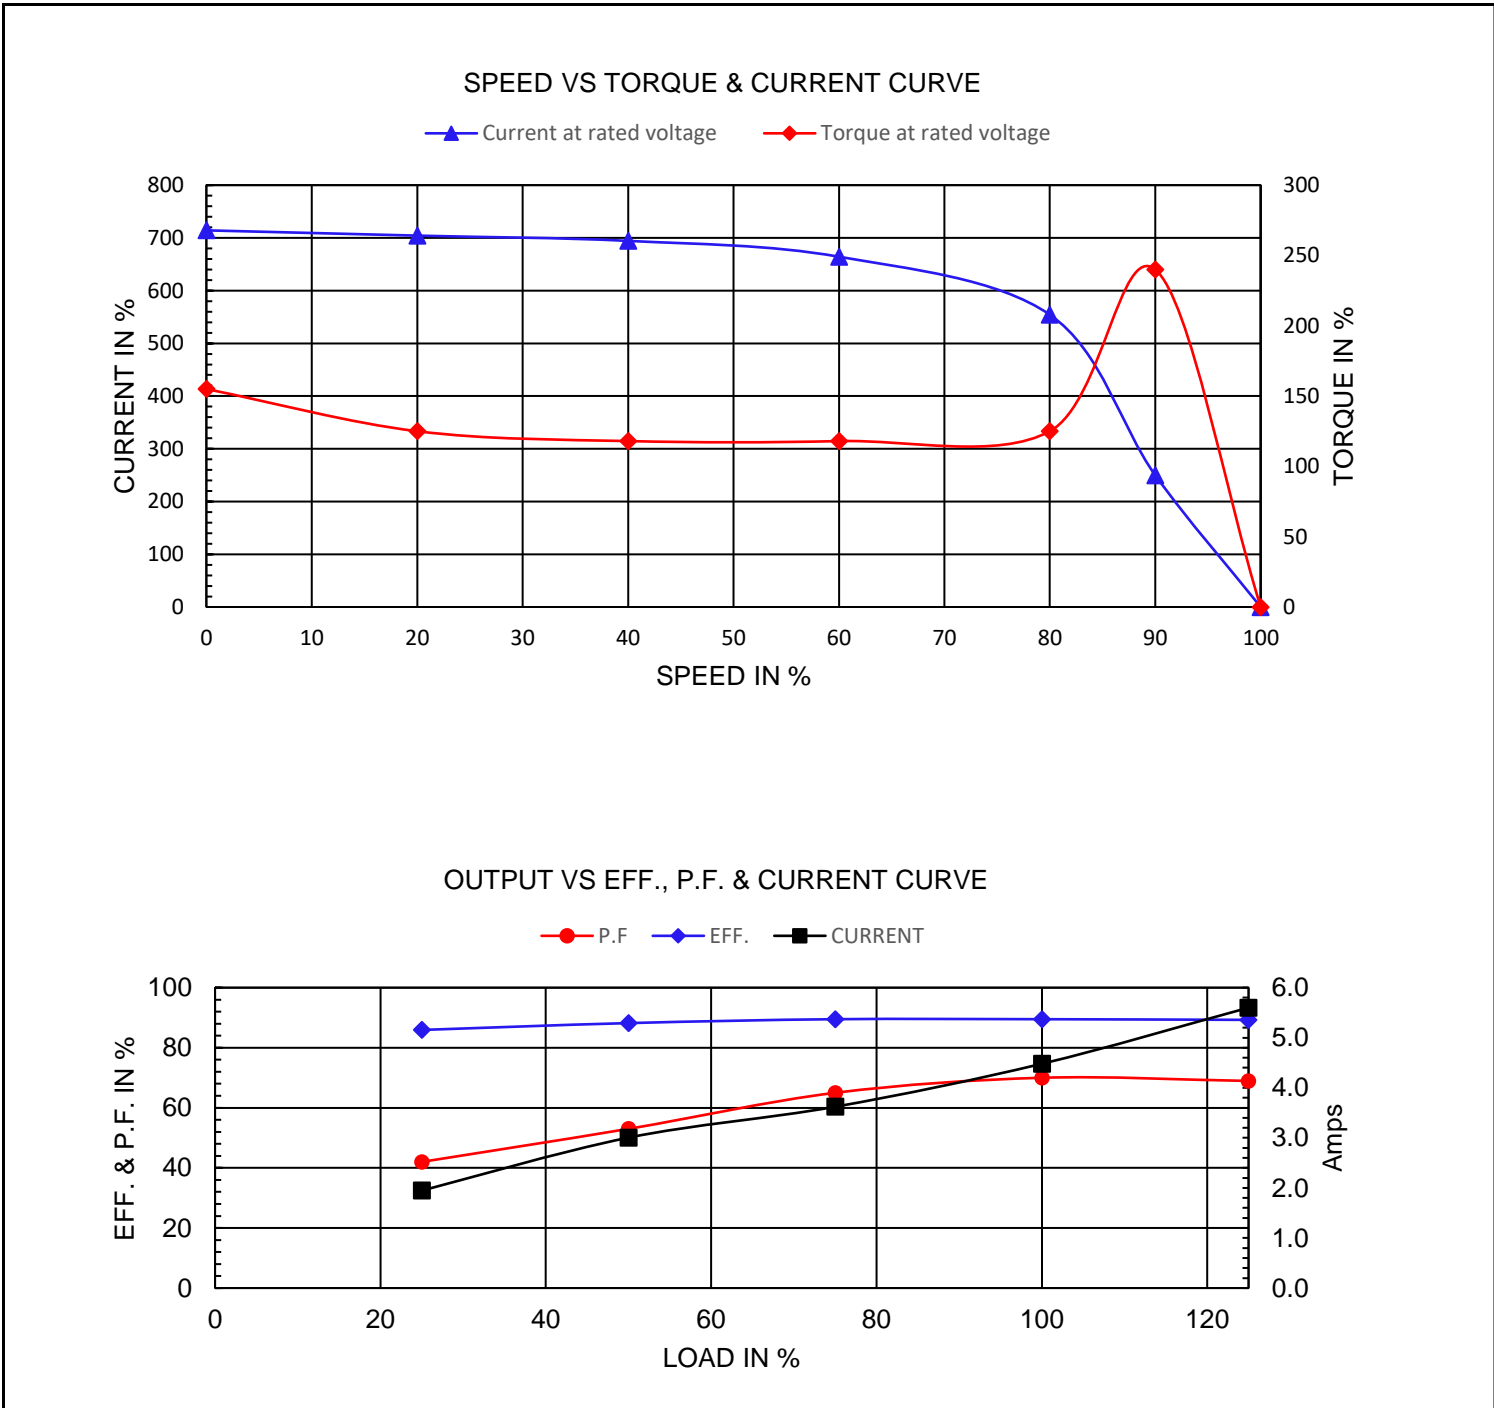

NAMEPLATE / WIRING

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Premium Efficiency Motor:

PEWWE3-12-213T

Document Generated: 31-Jul-2023
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

		NEMA Premium		3-PHASE INDUCTION MOTOR		259277 		CC006A
Model			Ser No.			Low Voltage		
HP		S.F.		IP		Encl		
Frame		P.F.		Code		Type		
Voltage	230/460	Hz		Ins Cl		Rating	°C Amb Cont	
Amps		RPM		Design		Date		
Nom. Eff.	FL	% 3/4		% 230/460V		10:1 CT 20:1 VT PWM VFD	1.0SF	
Class I DIV. 2 Groups A B C D				Amb.40°C	T3C(160°C)	DE Brng		
Class I Zone 2 IIC				Amb.55°C	T3A(180°C)	ODE Brng		
						Grease type:		
50Hz		HP	V	A	rpm	S.F1.0		

Model	PEWWE3-12-213T								
HP	3	S.F.	1.25	IP	IP55	Encl	TEFC		
Frame	213T	P.F.	0.7	Code	K	Type			
Voltage	230/460 V	Hz	60 Hz	Ins Cl	F	Ambient	40°C		
Amps	8.97/4.48	RPM	1175	Design	B	DE Brng 6308ZZ C3			
Nom. Eff.	FL	89.5%	3/4	89.5%	ODE Brng 6207ZZ C3				
Class 1 Division 2 Groups A,B,C,D					T3C(160°C)	Grease type: -			
50Hz	3 HP	200/400 V	11.3/5.64	A	970 rpm				