

DATA SHEET

Premium Efficiency Motor: **SSPE15-36-254TCRD,**

60 Hz

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 22-Feb-2023
Document ID:

Customer:

MOTOR INFORMATION	
HP	15
RPM	3600
Phase	3
Frequency	60
Voltage	230/460
Frame Size	254TC
Enclosure	TEFC
Degree of Protection	IP69K
Service Factor	1.15
Poles	2
Full Load Speed	3540
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	G
Duty Cycle	S1
Slip	1.67%
NEMA Design	B
Moment of Inertia	0.94 lb.ft.^2
Locked Rotor Time (Hot)	12 seconds
Sound Pressure Level	74 dB(A)
Number of Starts	10
Max Ambient Temperature	40° C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	Bidirectional
Area of Classification	Div.2 Class I, Gr. A,B,C&D T2B
Inverter Rating	10:1 CT/20:1 VT
Standard	NEMA MG1, UL1004
Approvals	CSA,UL,CE

EFFICIENCY/POWER FACTOR		
LOAD	EFF	P. F.
100%	91.0 %	0.9
75%	90.5 %	0.85
50%	90.0 %	0.76

TORQUE		
FULL LOAD	LRT	BDT
22 lb.ft.	200 %	260 %

AMPERAGE INFORMATION		
	230V	460V
Full Load Amps	37	18.5
Locked Rotor Amps	232	116
No Load Current	9	4.5
Usable at 208V		40

BEARING INFORMATION	
DE Bearing	6309 2RS
ODE Bearing	6309 2RS
Grease Type	Mobil Polyrex EM

ADDITIONAL DATA	
F2 Suitable	No
Shaft Material	304 Stainless Steel
Connection Diagram	12 Lead 2Δ/Δ
Approximate Weight	361 lbs.


MOTOR DRAWING

Premium Efficiency Motor: **SSPE15-36-254TCRD**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net

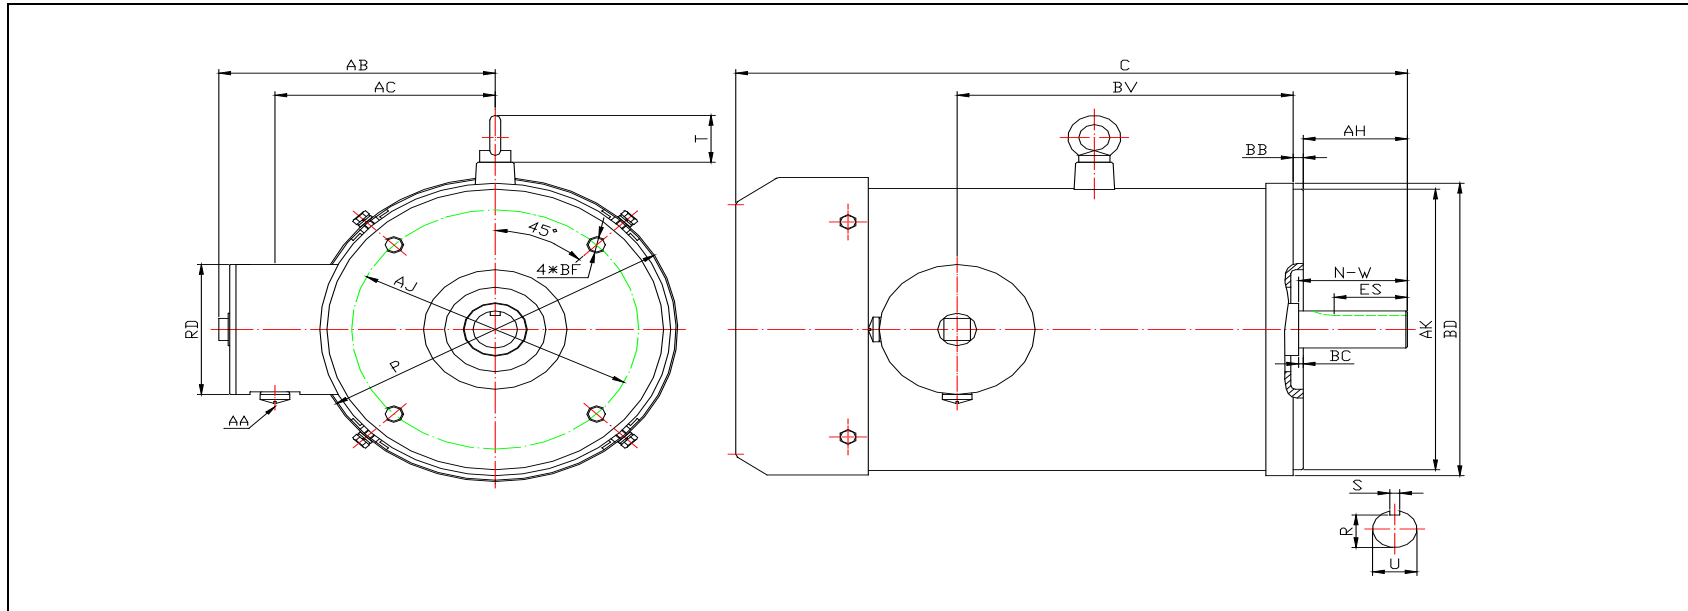

DIMENSION - INCHES

FLANGE MOUNTING						C	P	T	AB
AK	BD	AJ	BF	BB	BC				
8.5	11.72	7.25	4*1/2-13	0.25	0.25	23.2	12.7	2.1	8.9

SHAFT & KEY					
S	ES	R	N-W	U	AH
0.375	2.91	1.416	4	1.625	3.75

TERMINAL BOX				
AA	AB	AC	RD	BV
3/4 NPT	8.9	7.25	5.12	12.65

PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net




Premium Efficiency Motor:

SSPE15-36-254TCRD

Document Generated: 31-Jan-2023	Customer:
Document ID:	

Motor Type	SSPE				
Output Rating (HP)	15	FL Speed	3540		
Full Load Torque	22 lb.ft	LRT (%FLT)	200	460 volt FLA	18.5
Rotor Wk^2	0.94 lb-ft^2	BDT (%FLT)	260	230 volt FLA	37

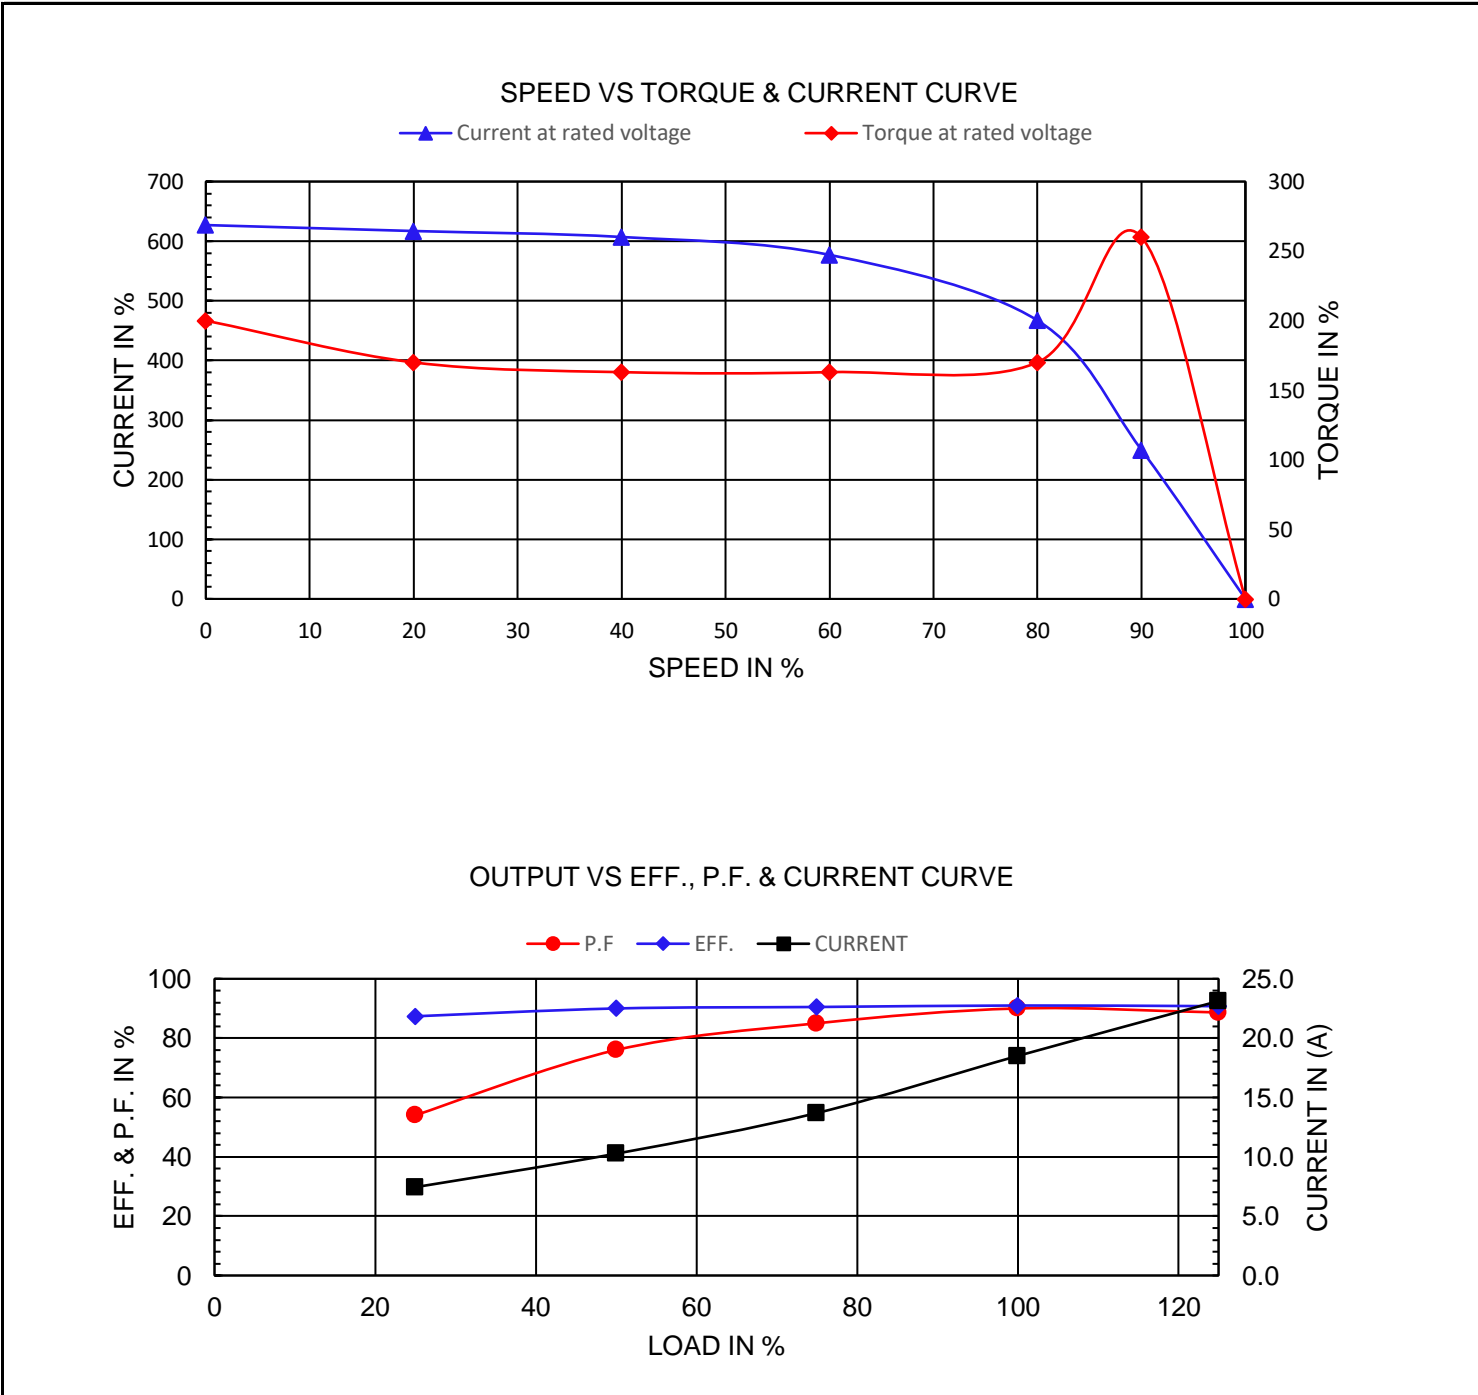

NAMEPLATE / WIRING

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Premium Efficiency Motor:

SSPE15-36-254TCRD

Document Generated: 31-Jan-2023
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

		THREE PHASE AC INDUCTION MOTOR INVERTER DUTY 20:1 VT 10:1 CT							
								Model .	
Hz 60 S. F. 1.15		Hz 50 S. F. 1.15		ENCL. TEFC		AMB. 40°C			
HP RPM		HP RPM		DUTY CONT		INS. F			
VOLTS 230/460		VOLTS 190/380		NEMA DES. B					
AMP		AMP		BRG DE					
CODE P. F.		CODE P. F.		BRG ODE					
EFF MIN		IE3 -		NO.					
								CC082A	

Model	SSPE15-36-254TCRD			FRAME	254TC	LB/WT	361 lbs.
Hz	60	S.F.	1.15	Hz	50	S.F.	1.15
HP	15	RPM	3540	HP	10	RPM	2950
VOLTS	230/460			VOLTS	190/380		
AMPS	37/18.5			AMPS	30.0/15.0		
CODE	G	P.F.	0.9	CODE	J	P.F.	0.82
EFF	91%	MIN	90%	IE3 -	90.1%		
BRG DE	6309 2RS						
BRG ODE	6309 2RS						