

DATA SHEET

Premium Efficiency Motor: **SSPE3-36-182TCRD,**

60 Hz

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 22-Feb-2023
Document ID:

Customer:

MOTOR INFORMATION	
HP	3
RPM	3600
Phase	3
Frequency	60
Voltage	230/460
Frame Size	182TC
Enclosure	TEFC
Degree of Protection	IP69K
Service Factor	1.15
Poles	2
Full Load Speed	3510
Insulation Class	F
Temp Rise	80°C
NEMA Code Letter	K
Duty Cycle	S1
Slip	2.50%
NEMA Design	B
Moment of Inertia	0.145 lb.ft.^2
Locked Rotor Time (Hot)	12 seconds
Sound Pressure Level	78 dB(A)
Number of Starts	10
Max Ambient Temperature	40° C
Max Elevation	1000 m.a.s.l (3300 f.a.s.l)
Mounting	F1
Rotation	Bidirectional
Area of Classification	Div.2 Class I, Gr. A,B,C&D T2B
Inverter Rating	10:1 CT/20:1 VT
Standard	NEMA MG1, UL1004
Approvals	CSA,UL,CE

EFFICIENCY/POWER FACTOR		
LOAD	EFF	P. F.
100%	86.5 %	0.85
75%	87.0 %	0.75
50%	86.0 %	0.63

TORQUE		
FULL LOAD	LRT	BDT
4.4 lb.ft.	270 %	290 %

AMPERAGE INFORMATION		
	230V	460V
Full Load Amps	8.1	4.05
Locked Rotor Amps	64	32
No Load Current	4.2	2.1
Usable at 208V		9

BEARING INFORMATION	
DE Bearing	6308 2RS
ODE Bearing	6306 2RS
Grease Type	Mobil Polyrex EM

ADDITIONAL DATA	
F2 Suitable	No
Shaft Material	304 Stainless Steel
Connection Diagram	9 Lead 2Y/Y
Approximate Weight	80 lbs.


MOTOR DRAWING

Premium Efficiency Motor: **SSPE3-36-182TCRD**

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net

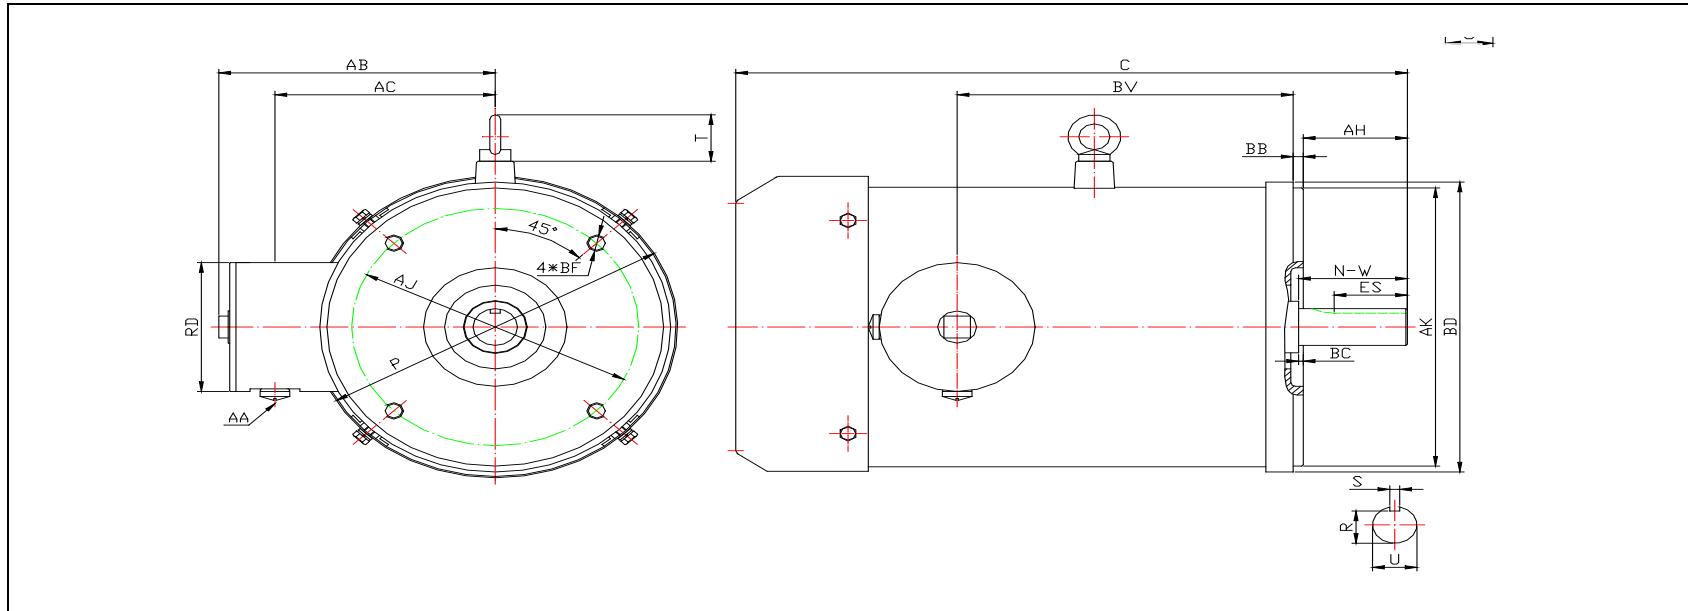

DIMENSION - INCHES

FLANGE MOUNTING						C	P	T	AB
AK	BD	AJ	BF	BB	BC				
8.5	8.85	7.25	4*1/2-13	0.25	0.12	17	9.25	1.45	7

SHAFT & KEY					
S	ES	R	N-W	U	AH
0.25	1.78	0.986	2.75	1.125	2.62

TERMINAL BOX				
AA	AB	AC	RD	BV
1/2 NPT	7	5.55	3.95	8.5

PERFORMANCE CURVES

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net




Premium Efficiency Motor:

SSPE3-36-182CRD

Document Generated:	31-Jan-2023	Customer:	
Document ID:			

Motor Type	SSPE			FL Speed	3510		
Output Rating (HP)	3			LRT (%FLT)	270	460 volt FLA	4.05
Full Load Torque	4.4	lb.ft		BDT (%FLT)	290	230 volt FLA	8.1
Rotor Wk^2	0.145	lb-ft^2					

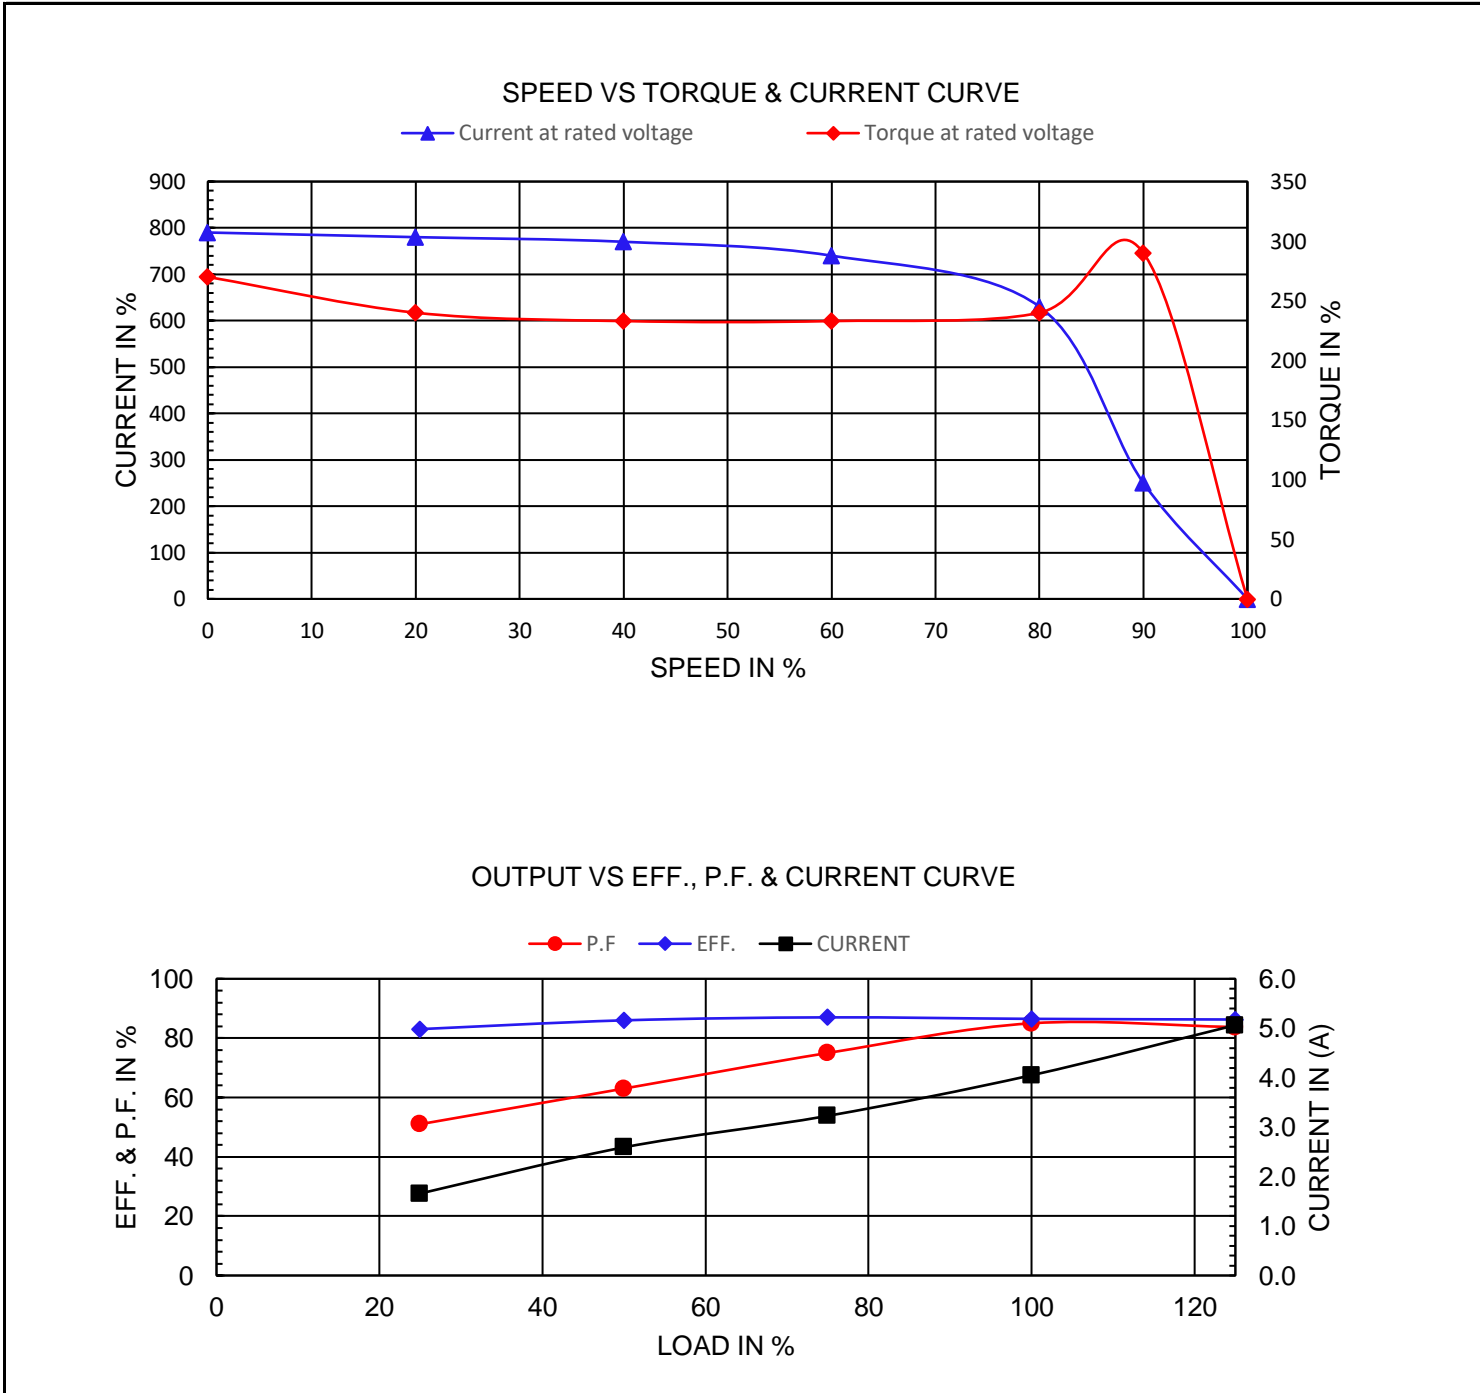

NAMEPLATE / WIRING

Premium Efficiency Motor:

SSPE3-36-182CRD

WorldWide Electric Corporation

1 (800) 808-2131

Worldwideelectric.net



Document Generated: 31-Jan-2023
Document ID:

Customer:

SAMPLE NAMEPLATE DATA

		THREE PHASE AC INDUCTION MOTOR INVERTER DUTY 20:1 VT 10:1 CT							
Model .		FRAME		IP 69K	LB/WT		230V 		
Hz 60	S. F. 1.15	Hz 50	S. F. 1.15	ENCL. TEFC	AMB. 40°C				
HP	RPM	HP	RPM	DUTY CONT	INS. F				
VOLTS 230/460		VOLTS 190/380		NEMA DES. B			460V 		
AMP		AMP		BRG DE					
CODE	P. F.	CODE	P. F.	BRG ODE					
EFF	MIN	IE3 -		NO.					
				 C 502259 US		 E 517327		CC082A	

Model	SSPE3-36-182CRD			FRAME	182TC	LB/WT	80 lbs.
Hz	60	S.F.	1.15	Hz	50	S.F.	1.15
HP	3	RPM	3510	HP	2	RPM	2910
VOLTS	230/460			VOLTS	190/380		
AMPS	8.1/4.05			AMPS	6.6/3.3		
CODE	K	P.F.	0.85	CODE	L	P.F.	0.80
EFF	86.5%	MIN	86%	IE3 -	84.2%		
BRG DE	6308 2RS						
BRG ODE	6306 2RS						